

## ExMGZ 100/200.ATEX Intrinsically Safe Barrier

---

### ATEX certified

Approval II (2) GD [EEx ib] IIB / IIC

---

### Compensation of voltage drop over zener barrier

Full sensor excitation voltage, high precision

---

### Two independent intrinsically safe inputs

For 1 or 2 sensors

---

### Circuit and power supply galvanically isolated

Shielded from electrical noise

---



- **ExMGZ 100/200.ATEX**

The ExMGZ 100/200.ATEX intrinsically safe barrier is used for applications in intrinsically safe or explosion proof environments classified as II(2)GD [EEx ib] IIB/IIC. It is designed for single or double channel tension measurement and can be used with any FMS amplifier, controller, and force sensor.

The ExMGZ 100/200.ATEX units are DIN rail mountable, utilize screw terminal connections and are easy to install between the electronic unit in an unprotected area and a force sensor in a protected area.


- **Functional description**

The ExMGZ 100/200.ATEX intrinsically safe barrier utilizes a zener limiter on the force sensor side. It controls the voltage to the force sensor while preventing over voltage.


A zener barrier is provided for each channel on the intrinsically safe side. Therefore the explosion proof area remains safe from hazardous voltage levels while still allowing the tension measurement or control to perform in the process.

A control circuit ensures that the voltage drop of the zener barrier is compensated and it is guaranteed that the full excitation voltage is provided to the force sensors.


**ExMGZ 100 / 200.ATEX • Electrical connection 1 channel**

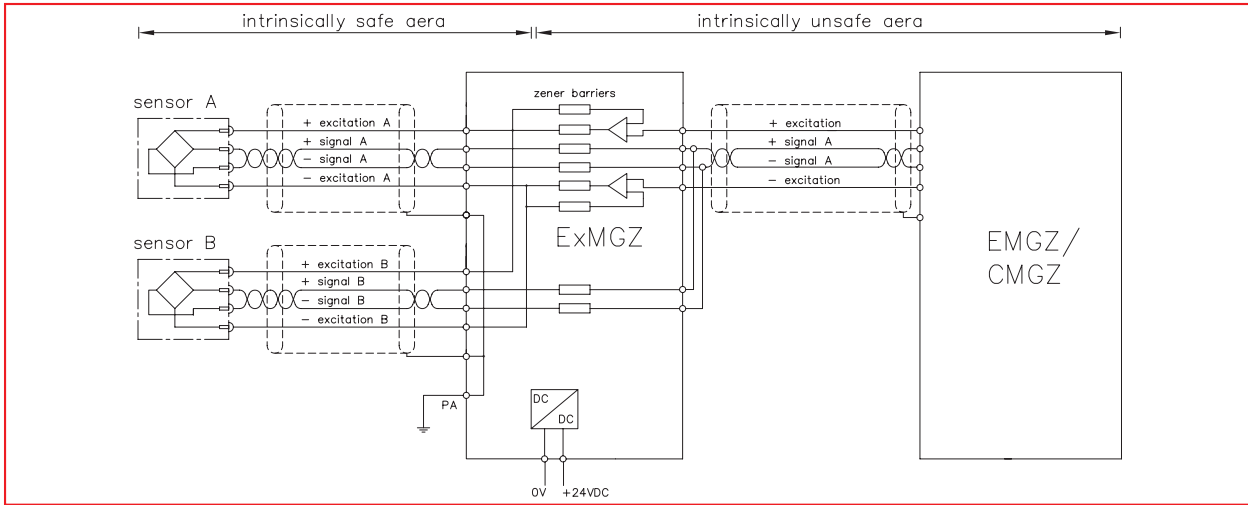

**ExMGZ 100 / 200.ATEX • Electrical connection 2 channel**

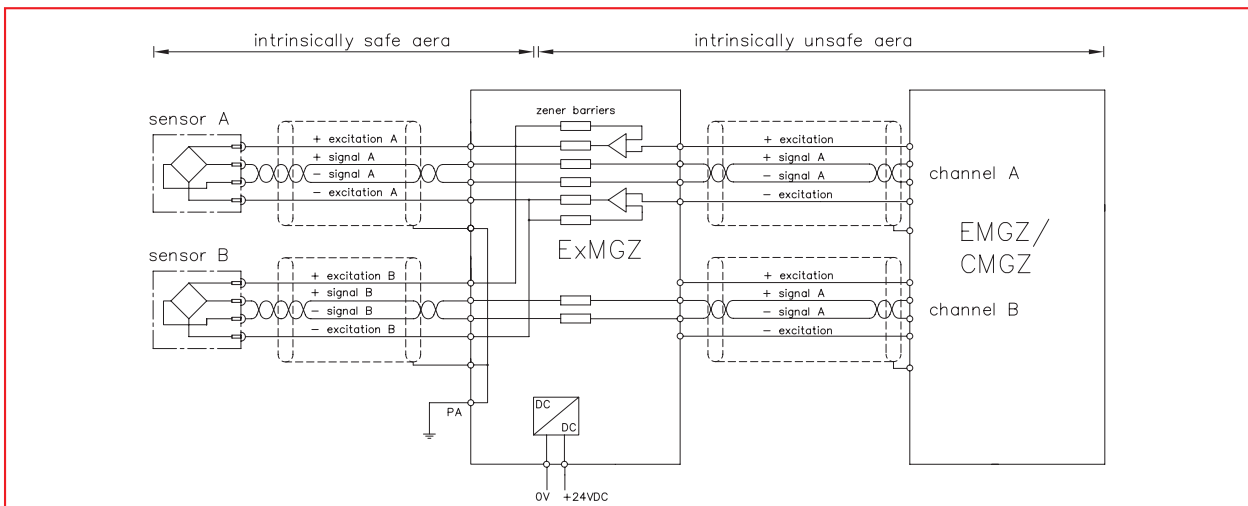

**ExMGZ 100 / 200.ATEX • Dimensions in mm**

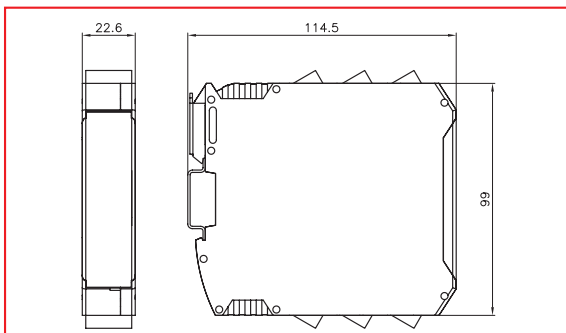

**ExMGZ • Technical data**

<b>Approval</b>	II(2)GD [EEx ib] IIB/IIC
<b>Applicable standards / directives</b>	EN 50020, 94/4/EG (ATEX 100 a)
<b>Identification</b>	BVS 05 ATEX E 069 X
<b>Sensor power supply</b>	Max. 5 VDC
<b>Explosion proofness</b>	With 1 zener barrier on each line
<b>Power supply</b>	18...36 VDC, galvanically isolated
<b>Power consumption</b>	2.5 W
<b>Connection</b>	Plug-in screw terminals
<b>Temperature range</b>	-20...+50 °C

**World Headquarters:**

**FMS Force Measuring Systems AG**  
 Aspstrasse 6  
 8154 Oberglatt (Switzerland)  
 Phone +41 44 852 80 80  
 Fax +41 44 850 60 06  
 info@fms-technology.com

**FMS USA, Inc.**  
 2155 Stonington Avenue  
 Suite 119  
 Hoffman Estates, IL 60169  
 Phone +1 847 519 4400  
 Fax +1 847 519 4401  
 fmsusa@fms-technology.com

**FMS UK**  
 Highfield, Atch Lench Road  
 Church Lench  
 Evesham WR 11 4UG  
 Phone +44 1386 871023  
 Fax +44 1386 871021  
 fmsuk@fms-technology.com

**FMS Italy**  
 Via Baranzate 67  
 20026 Novate Milanese  
 Phone +39 02 39487035  
 Fax +39 02 39487035  
 fmsit@fms-technology.com