

AMGZ Series Force Measuring Sensor with Dead Shaft Adapter

10 times overload protection

No recalibration required

20:1 force measuring range

Accuracy class 0.5%

Nominal forces from 22 - 500 lbs.

Sizes available for every application

Stainless steel sensor

Corrosion resistant, ultra durable




● **AMGZ Series**

The AMGZ Series Force Measuring Sensors are designed as dead shaft sensors to allow easy roller change in continuous material processing applications. They can be easily mounted to the machine frame with a single bolt or utilizing mounting brackets. The red point on the connector indicates the positive measuring direction. The AMGZ Force Measuring Sensor ensures that even with low material wrap angles and high roller weights, tension will still be measured accurately.

● **Functional Description**

Foil type strain gauges mounted in a full Wheatstone Bridge configuration in each sensor perform the actual tension measurement. This configuration combined with the flexion beam design ensures tension measurement with the highest accuracy and reliability under the most stringent requirements. The dead shaft adapter can be turned in any direction so that the shaft will always load from the top.

AMGZ Series ● Dimensions in mm [inch]

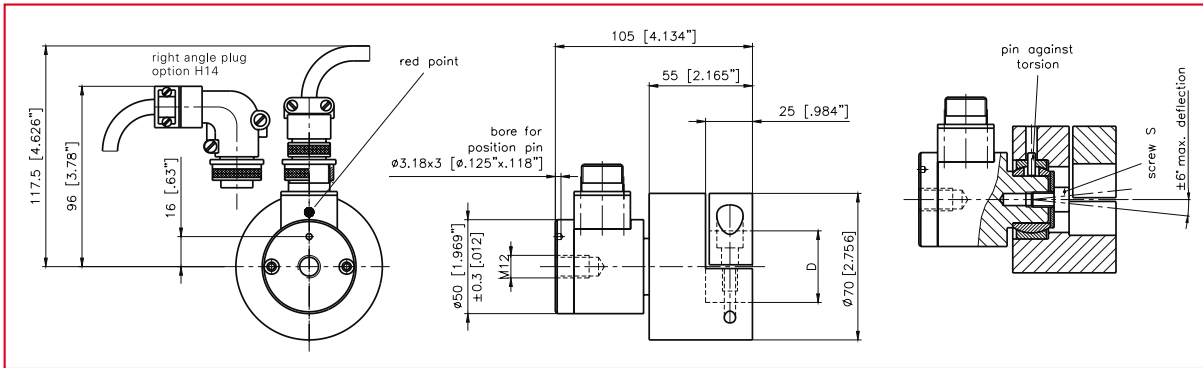

AMGZ Series ● Specifications

Sensor FMS Order Code	Nominal Force		S thread size	Weight with Adapter	
	N	lbs		kg	lbs
AMGZ205.100	100	22	M4	2.4	5.28
AMGZ205.200	200	45	M4	2.4	5.28
AMGZ205.375	375	84	M4	2.4	5.28
AMGZ205.500	500	112	M4	2.4	5.28
AMGZ205.750	750	169	M8	2.4	5.28
AMGZ205.1500	1500	337	M8	2.4	5.28
AMGZ205.2250	2250	506	M8	2.4	5.28

AMGZ Series ● Adapter

Adapter FMS Order Code	D	
	mm	inch
AMGZ205.DI125	31.75	1.25"
AMGZ205.DI150	38.10	1.50"
AMGZ205.DM25	25	0.98"

AMGZ Series ● Technical Data


Sensitivity	1.8 mV/V
Tolerance of sensitivity	< ±0.2%
Accuracy class	±0.5%
Temperature coefficient	±0.1% / 10 K [±0.0055% / °F]
Temperature range	-10...+60 °C [14 °F...140 °F]
Input resistance	350 Ω
Supply voltage	1...12 VDC
Overload protection	10 times rated nominal force
Sensor material	Stainless steel

Options:

- H14** = right angle plug
- H15** = connection plug opposite to the red point
- H16** = temperature range up to 150 °C [300 °F]
- H18** = straight waterproof plug
- H29** = modified wiring and sealing for use in aggressive media and high temperatures to 150°C [300°F]
- H30** = modified wiring and sealing for oil based environments

Order code:

AMGZ205.1500.DI125.H14



Scope of delivery:

Sensor, adapter, straight connection plug, mounting screw and washer

Special sizes available on request

World Headquarters:

FMS Force Measuring Systems AG
 Aspstrasse 6
 8154 Oberglatt (Switzerland)
 Tel. + 41 44 852 80 80
 Fax + 41 44 850 60 06
 info@fms-technology.com

FMS USA, Inc.
 925 East Rand Road · Suite 207
 Arlington Heights, IL 60004
 Phone 847 392 7872
 Fax 847 392 7873
 fmsusa@fms-technology.com

FMS UK
 Highfield, Atch Lench Road
 Church Lench
 Evesham WR 11 4UG
 Phone + 44 1386 871023
 Fax + 44 1386 871021
 fmsuk@fms-technology.com

www.fms-technology.com