

## DMGZ 300 Series Compression / Tension Load Cells

---

**10 times overload protection**

**No recalibration required**

---

**20 : 1 force measuring range**

**Wide measuring capability**

---

**Stainless steel sensor, aluminium sleeve**

**Corrosion resistant, ultra-durable**

---

**Compact design**

**Easy mounting with minimal space required**

---



### ● DMGZ 300

The DMGZ 300 Series load cells measure force in the direction of the center axis of the sensor. A force is applied via threaded shaft, or other means, to the measuring mechanism of the sensor. They can provide both compression or tension measurement. The integrated high overload protection protects the sensor against damage. Recalibration is not required.


### ● Functional description

The FMS DMGZ 300 Series compression / tension load cells utilize four foil-type strain gauges in a full wheatstone bridge configuration mounted on the sensor sleeve. This accurate and robust measuring method is ideal to work in harsh environments.

### ● Applications

- Compression or tension force measurement
- Nip pressure measurement
- Punching forces

**DMGZ Series • Dimensions in mm**

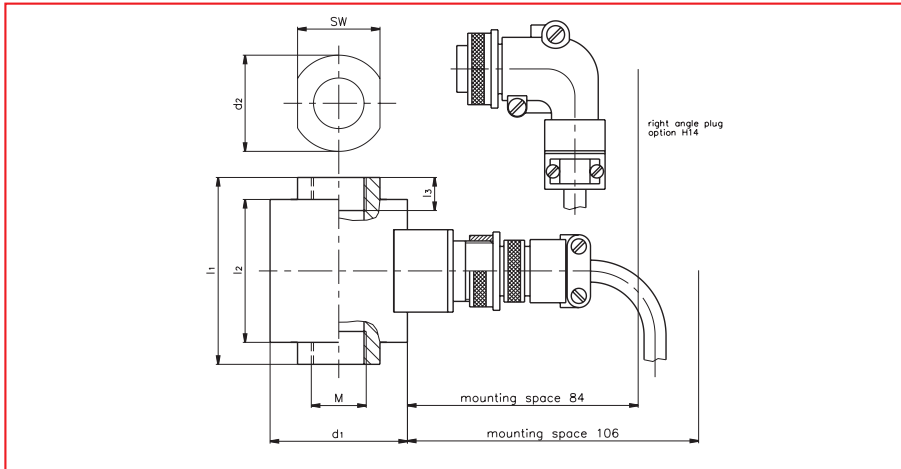

**DMGZ Series • Nominal force / Dimensions in mm**

Sensor Type	Nominal force kN	Dimensions mm							Overload protection		Weight kg
		d1	d2	l1	l2	l3	M	SW	Pressure	Tension	
DMGZ323A.RF	0.3	50	35	68	52	12	M 20 x 1.5	30	10 x	10 x	0.5
DMGZ325A.RF	0.5								10 x	10 x	
DMGZ331A.RF	1.0								10 x	10 x	
DMGZ3325A.RF	2.5								10 x	10 x	
DMGZ335A.RF	5								10 x	6 x	
DMGZ341A.RF	10								10 x	3 x	
DMGZ342A.RF	20	60	45	76	60	15	M 30 x 2	36	3 x	3 x	0.8
DMGZ345A.RF	50								3 x	3 x	

**DMGZ Series • Technical data**

<b>Sensitivity</b>	1.8 mV/V
<b>Tolerance of sensitivity</b>	< ± 0.2 %
<b>Accuracy class</b>	± 0.5 % (F <sub>nominal</sub> )
<b>Temperature coefficient</b>	± 0.1 % / 10 K
<b>Temperature range</b>	- 10... + 60 °C (option H16: -10... + 120 °C)
<b>Input resistance</b>	350 Ω
<b>Supply voltage</b>	1...12 VDC
<b>Sensor Material</b>	Force sensor: stainless steel Sensor sleeve: anodized aluminium

**Options:**

- H14** = Right angle connector
- H16** = Temperature range up to 120 °C
- H18** = Straight waterproof connector
- H29** = Modified wiring and sealing for use in aggressive media (mostly acids)
- H30** = Modified wiring and sealing for use in hydrocarbon media (mostly oils and fuels)

**Order code (example):**

**DMGZ335A.RF.H14**



**Scope of delivery:**

Straight connector

**World Headquarters:**

**FMS Force Measuring Systems AG**  
 Aspstrasse 6  
 8154 Oberglatt (Switzerland)  
 Phone + 41 44 852 80 80  
 Fax + 41 44 850 60 06  
 info@fms-technology.com

**FMS USA, Inc.**  
 2155 Stonington Avenue  
 Suite 119  
 Hoffman Estates, IL 60169  
 Phone + 1 847 519 4400  
 Fax + 1 847 519 4401  
 fmsusa@fms-technology.com

**FMS UK**  
 Highfield, Atch Lench Road  
 Church Lench  
 Evesham WR 11 4UG  
 Phone + 44 1386 871023  
 Fax + 44 1386 871021  
 fmsuk@fms-technology.com

**FMS Italy**  
 Via Baranzate 67  
 20026 Novate Milanese  
 Phone + 39 02 39487035  
 Fax + 39 02 39487035  
 fmsit@fms-technology.com