

RMGZ 800 A Force Measuring Roller

**Medium to high tension forces
(100 – 8000 N) [22 – 1799 lbf]**
Wide material processing range

10 times overload protection
Recalibration is not required

Accuracy class 0.5 %
**Wide measuring capability
at high resolution**

Lifetime lubricated ball bearings
No maintenance necessary



● Functional Description


FMS force measuring roller RMGZ 800 A series is used to measure the tension in wire, cable and narrow flat materials. An application specific sheave or pulley is mounted to the covering of the two lifetime lubricated ball bearings. A mounting hole with a key-way is required in the machine frame. The key-way holds the position pin which prevents the sensor from twisting. The location of the position pin depends on the direction of force and the position of the red point.

● Measuring principle

The force measuring rollers apply the force to the measuring web in a parallel plane as opposed to a typical bending beam. This ensures maximum accuracy and measuring sensitivity. Four foil-type strain gauges configured in a full Wheatstone Bridge are utilized to measure the material tension. A mechanical hard stop ensures the highest overload protection and makes the sensor virtually indestructible.

This combination guarantees the highest accuracy and reliability without the need for recalibration.

RMGZ 800 A Force measuring roller • Dimensions in mm or [inch]

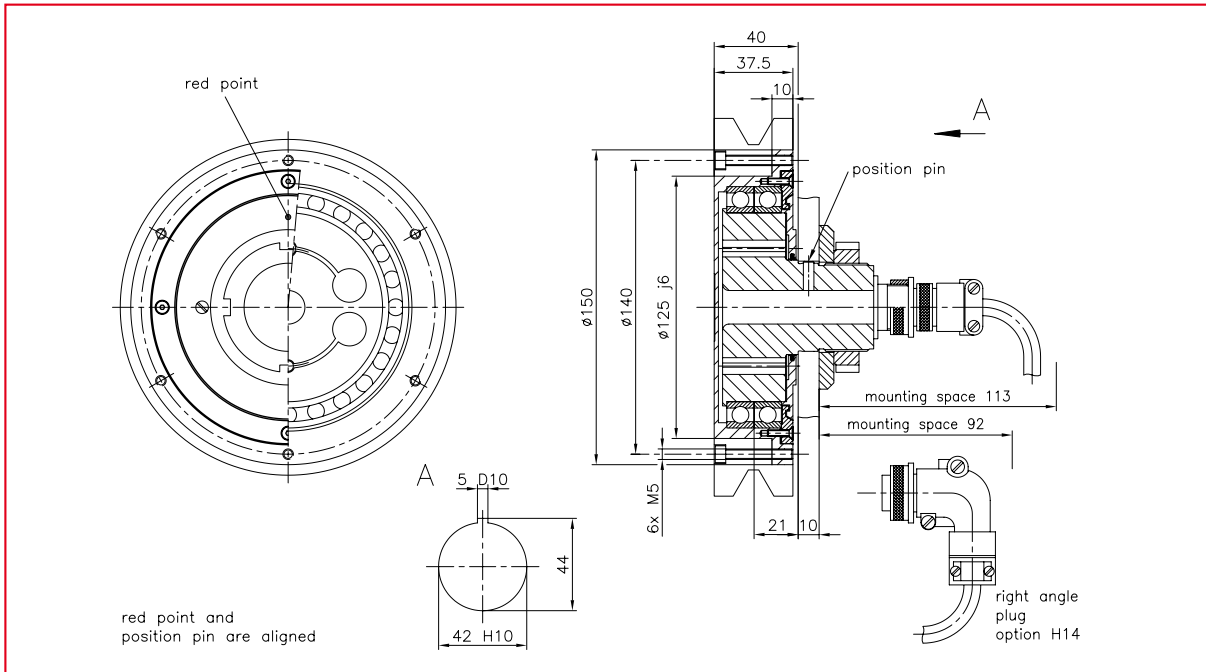

RMGZ 800 A Force measuring roller • Nominal force / Dimensions

Nominal force N [lbf]	Order code FMS	Load rating C dyn kN [lbf]	Speed limit Rev/min	Weight kg [lbs]
100 [22]	RMGZ821 A	19.6 [4362]	5300	3.0 [6.6]
200 [45]	RMGZ822 A			
500 [112]	RMGZ825 A			
1000 [225]	RMGZ831 A			
2000 [450]	RMGZ832 A			
4000 [899]	RMGZ834 A			
6000 [1349]	RMGZ836 A			
8000 [1799]	RMGZ838 A			

Options:

- H14** = Right angle connector
- H16** = Temperature range up to 120 °C [248 °F]
- H18** = Straight waterproof connector
- H29** = For use in aggressive media

Order code (example):

RMGZ822.A.H14

Scope of delivery:

Connector
(Sheaves are available options and not typically included)

RMGZ 800 A Force measuring roller • Technical data

Sensitivity	1.8 mV / V
Tolerance of sensitivity	< ± 0.2 %
Accuracy class	± 0.5 % (F _{nominal})
Temperature coefficient	± 0.1 % / 10 K
Temperature range	- 10...+ 60 °C (option H16: -10...+ 120 °C) 14... 140 °F (option H 16: 14...248 °F)
Input resistance	350 Ω
Supply voltage	1...12 VDC
Overload protection	10 times the rated nominal force
Material	Force sensor: steel Rotating flange: aluminium
Protection class	Sealed against dust IP 40

World Headquarters:

FMS Force Measuring Systems AG
Aspstrasse 6
8154 Oberglatt (Switzerland)
Phone + 41 44 852 80 80
Fax + 41 44 850 60 06
info@fms-technology.com

FMS USA, Inc.
2155 Stonington Avenue
Suite 119
Hoffman Estates, IL 60169
Phone + 1 847 519 4400
Fax + 1 847 519 4401
fmsusa@fms-technology.com

FMS UK
Highfield, Atch Lench Road
Church Lench
Evesham WR 11 4UG
Phone + 44 1386 871023
Fax + 44 1386 871021
fmsuk@fms-technology.com

FMS Italy
Via Baranzate 67
20026 Novate Milanese
Phone + 39 02 39487035
Fax + 39 02 39487035
fmsit@fms-technology.com