


FMS Tension Control / Force Sensors

RMGZ800A-Series Heavy duty force sensor for pulley

- **For a wide range of applications**
Nominal forces from 100 to 8'000 N
(22 to 1'760 lbf.)
- **Robust and durable**
Overload protection up to 10-times
nominal force
- **Precise performance even at low tension values**
Measuring range 30:1
Accuracy class $\pm 0.5\%$

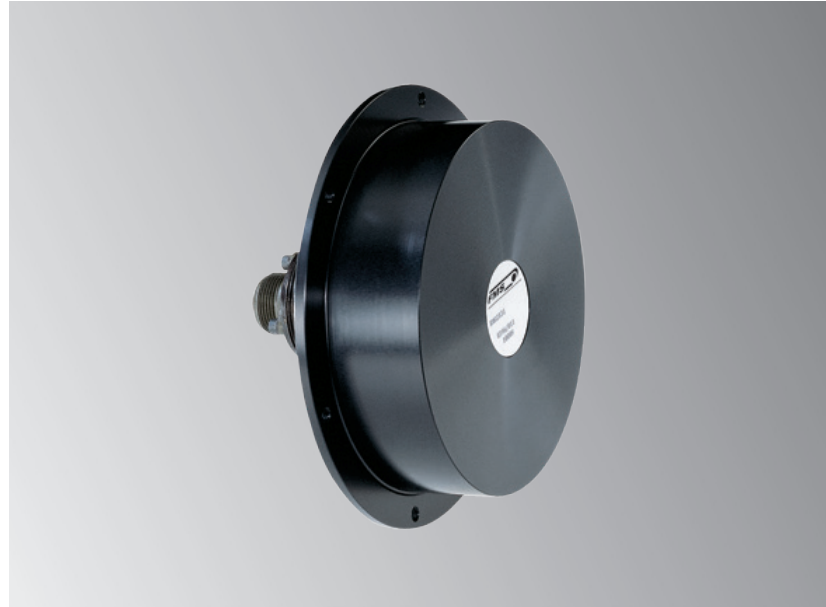


RMGZ800A-Series

The force sensors of the RMGZ800-Series are used for the tension measurement in filamentary material. A large variety of standard pulleys can be mounted on the rotating flange. The installation of the force sensor to the machine frame is realized by means of a bore with keyway. The force sensors of the RMGZ800-Series can be used in static applications as well as for measurements in rotating applications (planetary or tubular stranders, bunchers, twistors, etc.). Standard pulleys are not supplied by FMS.

Functional description

The RMGZ800-Series force measuring sensor combines the bearing seat of the pulley and the force sensor within the same housing, thus minimizing the required installation space. The substantial overload protection translates to eliminated/minimized calibration issues due to machine upset conditions. The movement of the bending beam, which is proportional to the applied force, is detected by strain gauges arranged in a full bridge circuit and then converted into an electrical signal. This simple measurement principle delivers precise results even with low material tension and small web wrap angles. The Red Point, as located on the sensor body, should be aligned with the direction of the resultant force due to material tension.

RMGZ800A-Series : Dimensions

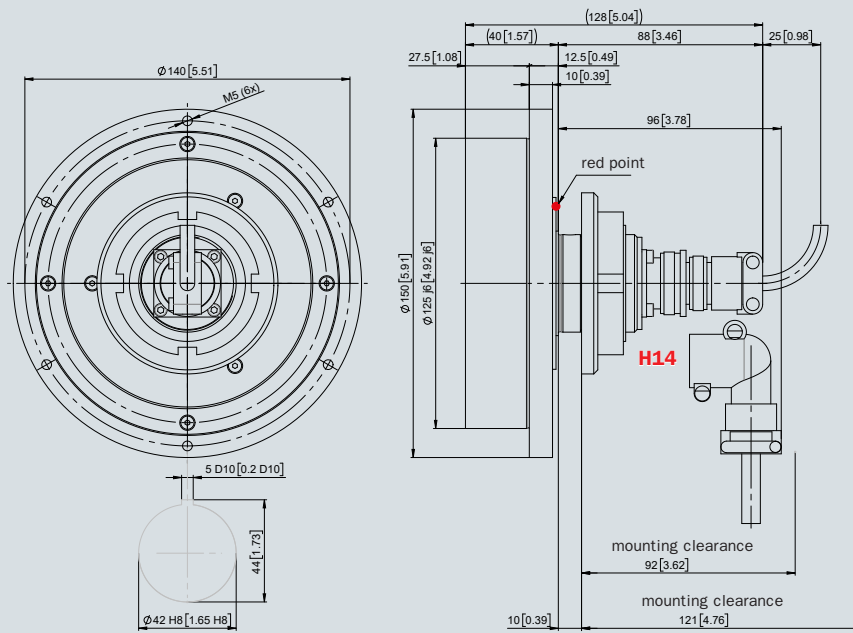

RMGZ800A-Series : Nominal forces, Deflection, Weight

Size Type	Nominal force N (.lbf)	Deflection mm (.in)	Weight kg (.lbs)
RMGZ800A	100 (22.48)	0.19 (0.0075)	2.8 (6.17)
	200 (44.96)	0.18 (0.0071)	2.8 (6.17)
	500 (112.40)	0.18 (0.0071)	2.8 (6.17)
	1000 (224.81)	0.15 (0.0059)	2.8 (6.17)
	2000 (449.62)	0.15 (0.0059)	2.8 (6.17)
	4000 (899.24)	0.13 (0.0051)	2.8 (6.17)
	6000 (1348.85)	0.13 (0.0051)	2.8 (6.17)
	8000 (1798.47)	0.13 (0.0051)	2.8 (6.17)

RMGZ800A-Series : Technical data	
Sensitivity	1.8 mV / V
Tolerance of sensitivity	< ±0.2%
Accuracy class	±0.5% (F _{Nom})
Temperature coefficient	±0.1% / 10 K
Temperature range	-10 °C to +60 °C (14 F to 140 F)
Input resistance	350 Ω
Power supply	1 to 10 VDC
Overload protection	10-times nominal force F _{Nom}
Material main body	Stahl
Protection class	IP 40
Electrical connection	Male flange connector, amphenol, 4-pole
Repeatability error	0.05%
Measuring range	30:1

RMGZ800A-Series : Order code	
RMGZ8	00A .500 .H22
	Options
	Nominal force rating in N
	Size, design revision A
	Series

RMGZ800A-Series : Options	
H14	right-angle connector in scope of supply, replaces straight connector
H16	temperature range up to 120°C (248°F)
H18	with water tight, straight connector, replaces original connector
H29	resistant against aggressive media, especially acids (please specify), up to 120°C (248°F)

RMGZ800A-Series : Scope of supply	
● force sensor ● straight connector (female) ● installation nut with washer	

RMGZ800A-Series : Accessories	
● cable, 1 m (3.25 ft.) without connector ● cable, 10 m (32.8 ft.) without connector ● cable, 5 m (16.4 ft.) without connector ● cable, 2 m (6.5 ft.) without connector ● connector, amphenol, 4-pole, straight ● connector, amphenol, 4-pole, right angle	

RMGZ800A-Series : Typical application



Other products : Tension Control

Measuring Amplifiers



Tension Controllers



Intrinsically Safe Barrier



About us

FMS Force Measuring Systems AG is the market leader in the field of web tension measurement, control and specialist for web guiding solutions. For the wire industry we are the only manufacturer offering a complete range of technologies for force measurement, data processing and radio transmission of signals.

Our in house developed products are used in the manufacturing industry, converting, metals, paper, textiles, as well as in cable and wire rope production. Utilising the latest technology, high quality components and a firm understanding of customer applications, FMS supports customers worldwide in the effort to maximize the productivity of their machines. Since 1993, our highly qualified employees have been creating high-end solutions for machine builders and plant operators. As an owner-managed company, we pride ourselves on being personal and approachable with the ability to make decisive moves fast.

World Headquarters: FMS Force Measuring Systems AG

Aspstrasse 6 • 8154 Oberglatt (Switzerland) • Phone + 41 44 852 80 80 • Fax + 41 44 850 60 06
 info@fms-technology.com • www.fms-technology.com