

FMS Tension Control / Force Sensors

ZMGZ-Series Force sensor rolls without shaft

- **For a wide range of applications**
Nominal force ratings from 100 to 3'000 N
(22 to 674 lbf.)
- **No need to change a standard machine design for special applications**
25 or 35 mm shaft journal for standard bearings
- **Easy installation of standard bearings**
Options include high temperature and vacuum chamber (to 1E-7 hPa) construction
- **Precise measuring results**
Measuring range 30:1
Accuracy class $\pm 0.5\%$



ZMGZ-Series


The ZMGZ-Series force sensor offers flexible installation options, and are designed for the measurement of tension on continuous material processing lines where idler rolls with integrated bearings without shaft are utilized. The product is available in two sizes. The shaft journals of 25 or 35 mm diameter accept standard bearings.

Functional description

The ZMGZ-Series force measuring sensor combines the bearing seat and the force sensor within the same housing, thus minimizing the required installation space. The substantial overload protection translates to eliminated/minimized calibration issues due to machine upset conditions. The movement of the bending beam, which is proportional to the applied force, is detected by strain gauges arranged in a full bridge circuit and then converted into an electrical signal. This simple measurement principle delivers precise results even with low material tension and small web wrap angles. The Red Point, as located on the sensor body, should be aligned with the direction of the resultant force due to web tension.

DATA SHEET

FMS Tension Control | Force Sensors | **ZMGZ-Series**

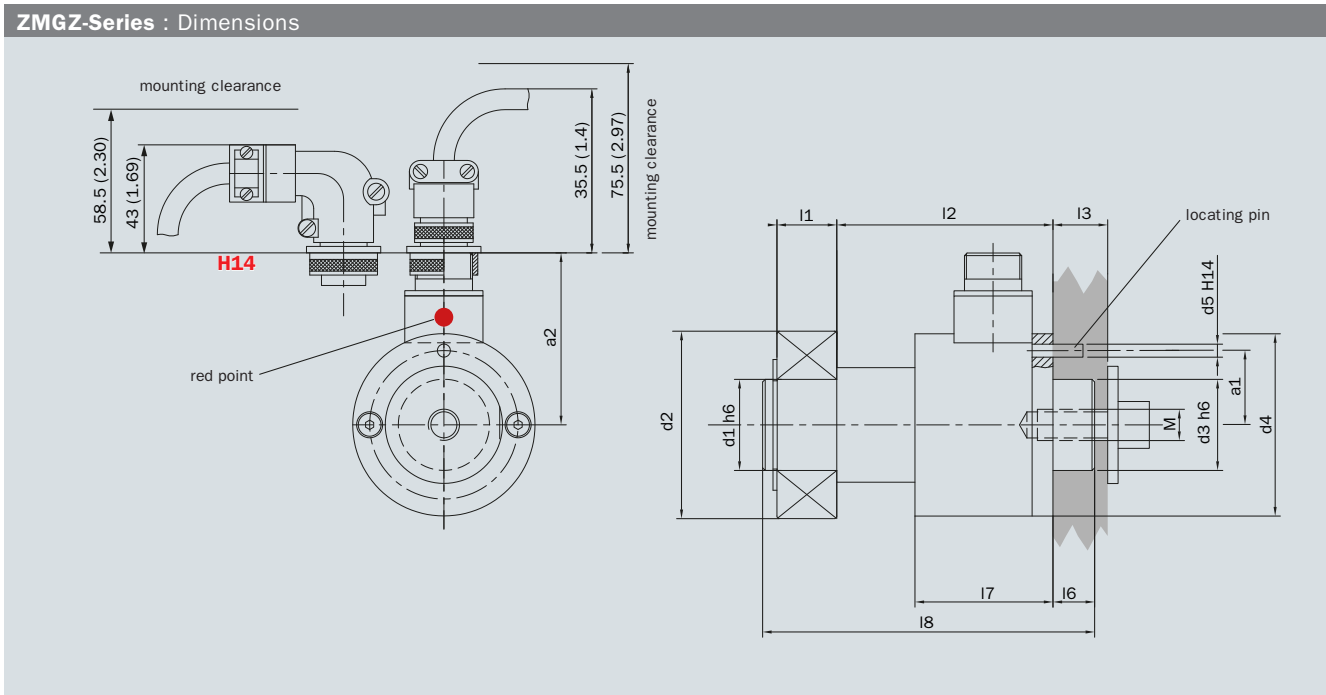

Bearing types for ZMGZ205: 2205.2RS.TV or 63305.2RSR; Bearing types for ZMGZ307: 2207.2RS.TV or 63307.2RSR

| ZMGZ-Series : Specifications in mm (in.) | | | | | | | | |
|--|-----------|-----------|-----------|-----------|----------|-----|-------------|-------------|
| Size | d1 | d2 | d3 | d4 | d5 | M | a1 | a2 |
| ZMGZ205 | 25 (0.98) | 52 (2.05) | 30 (1.18) | 50 (1.97) | 4 (0.16) | M10 | 20 (0.79) | 54.5 (2.15) |
| ZMGZ307 | 35 (1.38) | 72 (2.84) | 35 (1.38) | 70 (2.76) | 5 (0.20) | M12 | 28.5 (1.12) | 66 (2.60) |

| ZMGZ-Series : Specifications in mm (in.) | | | | | | |
|--|-----------|-------------|-------------------|-----------|-------------|--------------|
| Size | l1 | l2 | l3 | l6 | l7 | l8 |
| ZMGZ205 | 18 (0.71) | 68.5 (2.70) | 12-18 (0.47-0.71) | 10 (0.40) | 43.5 (1.71) | 100 (3.94) |
| ZMGZ307 | 23 (0.91) | 83 (3.27) | 18-28 (0.71-1.10) | 16 (0.63) | 53 (2.09) | 127.5 (5.02) |

| ZMGZ-Series : Nominal forces, Deflection, Weight | | | |
|--|---|------------------------|---------------------|
| Size Typ | Nominal force N, kN (lbf.) | Deflection mm (in.) | Weight kg (.lbs) |
| ZMGZ205 | 100, 200, 375, 750, 1500 (22, 45, 84, 169, 337) | 0.15 (0.0059) | 1.0 (2.20) |
| ZMGZ307 | 100, 200, 375, 750, 1500, 3000 (22, 45, 84, 169, 337, 674) | 0.15 (0.0059) | 2.2 (4.85) |

| ZMGZ-Series : Technical data | |
|---------------------------------|---|
| Sensitivity | 1.8 mV / V |
| Tolerance of sensitivity | < ±0.2% |
| Accuracy class | ±0.5% (F _{Nom}) |
| Temperature coefficient | ±0.1% / 10 K |
| Temperature range | -10 °C to +60 °C (14 F to 140 F) |
| Input resistance | 350 Ω |
| Power supply | 1 to 10 VDC |
| Overload protection | 10 times nominal force F _{Nom} |
| Material main body | Stainless steel |
| Protection class | IP 42 |
| Electrical connection | Male flange connector, amphenol, 4-pole |
| Repeatability error | 0.05% |
| Measuring range | 30:1 |

| ZMGZ-Series : Order code | |
|--------------------------|------------------------------|
| ZMGZ | 205 .100 .25 .H14.H16 |
| | Options |
| | Journal diameter in mm |
| | Nominal force rating in N |
| | Size |
| | Series |

| ZMGZ-Series : Options | |
|-----------------------|--|
| H14 | right-angle connector in scope of supply, replaces straight connector |
| H16 | temperature range up to 120°C (248°F) |
| H18 | with water tight, straight connector, replaces original connector |
| H21 | electrical connection with PG gland with 5 m (16.4 ft.) cable, replaces connector |
| H28 | red point offset 180° |
| H29 | resistant against aggressive media, especially acids (please specify), up to 120°C (248°F) |
| H30 | resistant against aggressive media, especially hydrocarbons (please specify) up to 120°C (248°F) |
| H31 | for vacuum applications to 1E-7 hPa 1E-5 Torr, temperature range up to 120°C (248°F) |

| ZMGZ-Series : Scope of supply | |
|---|--|
| ● force sensor ● straight connector (female) ● clip ring ● installation screw with washer | |

| ZMGZ-Series : Accessories | |
|--|--|
| ● cable, 1 m (3.25 ft.) without connector ● cable, 10 m (32.8 ft.) without connector ● cable, 5 m (16.4 ft.) without connector ● cable, 2 m (6.5 ft.) without connector ● connector amphenol, 4-pole, straight ● connector amphenol, 4-pole, right angle | |

ZMGZ-Series : Typical application



Other products : Tension Control

| Measuring Amplifiers | Tension Controllers | Intrinsically Safe Barrier |
|---|---|---|
|  |  |  |

About us

FMS Force Measuring Systems AG is the market leader in the field of web tension measurement, control and specialist for web guiding solutions. For the wire industry we are the only manufacturer offering a complete range of technologies for force measurement, data processing and radio transmission of signals.

Our in house developed products are used in the manufacturing industry, converting, metals, paper, textiles, as well as in cable and wire rope production. Utilising the latest technology, high quality components and a firm understanding of customer applications, FMS supports customers worldwide in the effort to maximize the productivity of their machines. Since 1993, our highly qualified employees have been creating high-end solutions for machine builders and plant operators. As an owner-managed company, we pride ourselves on being personal and approachable with the ability to make decisive moves fast.

World Headquarters: FMS Force Measuring Systems AG

Aspstrasse 6 • 8154 Oberglatt (Switzerland) • Phone + 41 44 852 80 80 • Fax + 41 44 850 60 06
 info@fms-technology.com • www.fms-technology.com