

FMS Belt Scales / Measuring Rollers

BMGZ021-Series Robust measuring roller for flat conveyor belts

Longest lifetime

Robust design, all components enclosed, integrated, contact-less speed detection

Precise measuring results

10'000-times proven technology, direct force detection on the shaft, w/o deflection or any braces

• Compact, maintenance-free

Integrated speed detection without friction wheel, dual shaft sealings

• Simple and universal retrofit

Sophisticated and proven concept with multiple installation options




BMGZ021-Series


The flat measuring rollers of the BMGZ021-series are designed for operation in most severe conditions and under steady load in mobile and stationary plants that process heavy, bulky goods, such as sand, gravel, stones, coal, building rubble etc. A wide portfolio of sizes for standard belts offers solutions for most applications.


Functional description


The FMS measuring roller normally substitutes a regular idler roller station of the conveyor belt. The FMS measuring roller is selected according to the width of the conveyor belt. Both measuring roller axis are supported by force measuring sensors. This direct measurement at the point of load transmission makes the measuring system insensitive to forces that act in direction of the moving belt. Additional components (guiding beams and connections to the frame, etc.) to isolate the force are not required and lead to an extremely slim design. With an installation height of only 150 mm (5.9 in.) the FMS measuring roller can be easily installed where space is limited, e.g. in mobile crushers or screening plants. The adjustable support of the measuring roller can be adapted to various frame dimensions and widths. The mounting brackets simplify the installation and are also supplied. The integrated, sealed and contact-less speed detection is wear- and maintenance-free. It is also installed directly on the axis of the measuring roller.

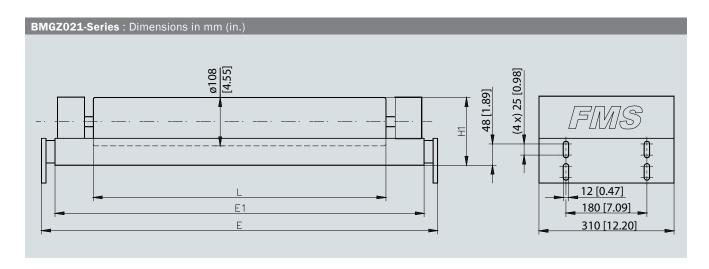


BMGZ021-Series: Dimensions					
Туре	Belt width	L	E	E1	H1
	mm (in.)	mm (in.)	mm (in.)	mm (in.)	mm (in.)
BMGZ021.020	400 (15.7)	400 (15.7)	600 - 970 (23.6 - 38.2)	580 (22.8)	150 (5.9)
BMGZ021.030	500 (19.7)	500 (19.7)	700 - 1070 (27.6 - 42.1)	680 (26.8)	150 (5.9)
BMGZ021.040	650 (25.6)	650 (25.6)	850 - 1220 (33.5 - 48.0)	830 (32.7)	150 (5.9)
BMGZ021.050	800 (31.5)	800 (31.5)	1000 - 1370 (39.4 - 53.9)	980 (38.6)	150 (5.9)
BMGZ021.060	1000 (39.4)	1000 (39.4)	1200 - 1570 (47.2 - 61.8)	1180 (46.5)	150 (5.9)

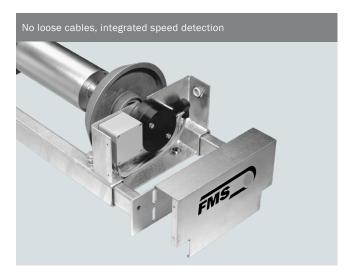


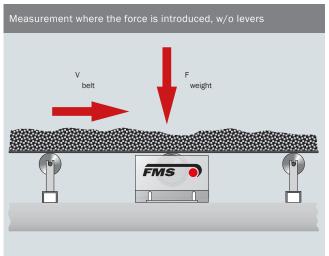

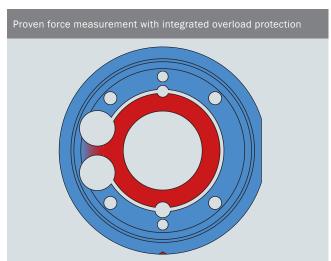

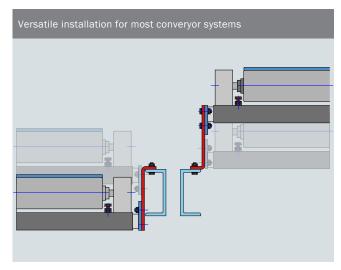


BMGZ021: Technical data		
Accuracy class	± 0.3 % (FNenn)	
Temperature range	-10 to +60 °C (14 to 140 F)	
Overload protection force sensor	10 times nominal force (FNom)	
Material frame	galvanized steel	
Protection class	IP65	

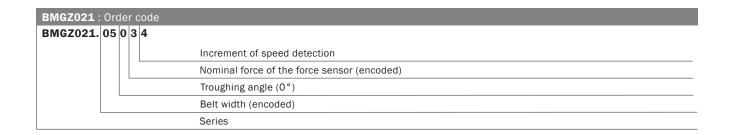



BMGZ021 : Accessories

• connection cable from measuring roller to electronics, 15 m (49 ft.) (other lengths on request)

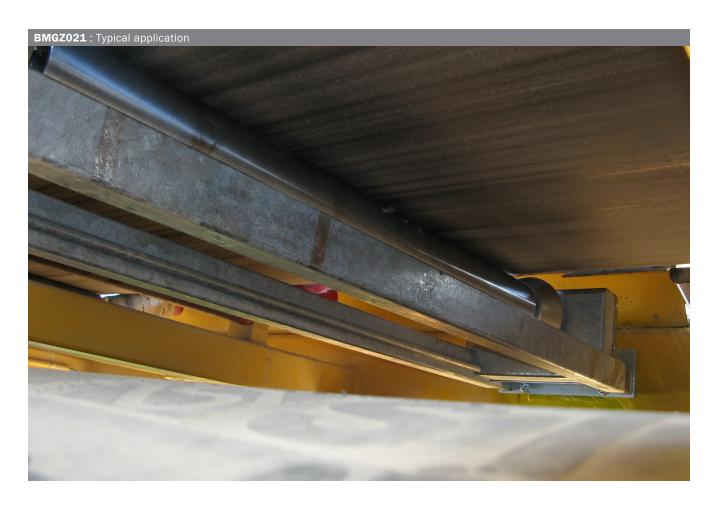

Other products: Construction and Recycling

BMGZ710 electronics

BMGZ041 measuring roller for troughed belts





About us

FMS Force Measuring Systems AG is the market leader in the field of web tension measurement, control and specialist for web guiding solutions. For the wire industry we are the only manufacturer offering a complete range of technologies for force measurement, data processing and radio transmission of signals.

Our in house developed products are used in the manufacturing industry, converting, metals, paper, textiles, as well as in cable and wire rope production. Utilising the latest technology, high quality components and a firm understanding of customer applications, FMS supports customers worldwide in the effort to maximize the productivity of their machines. Since 1993, our highly qualified employees have been creating high-end solutions for machine builders and plant operators. As an owner-managed company, we pride ourselves on being personal and approachable with the ability to make decisive moves fast.