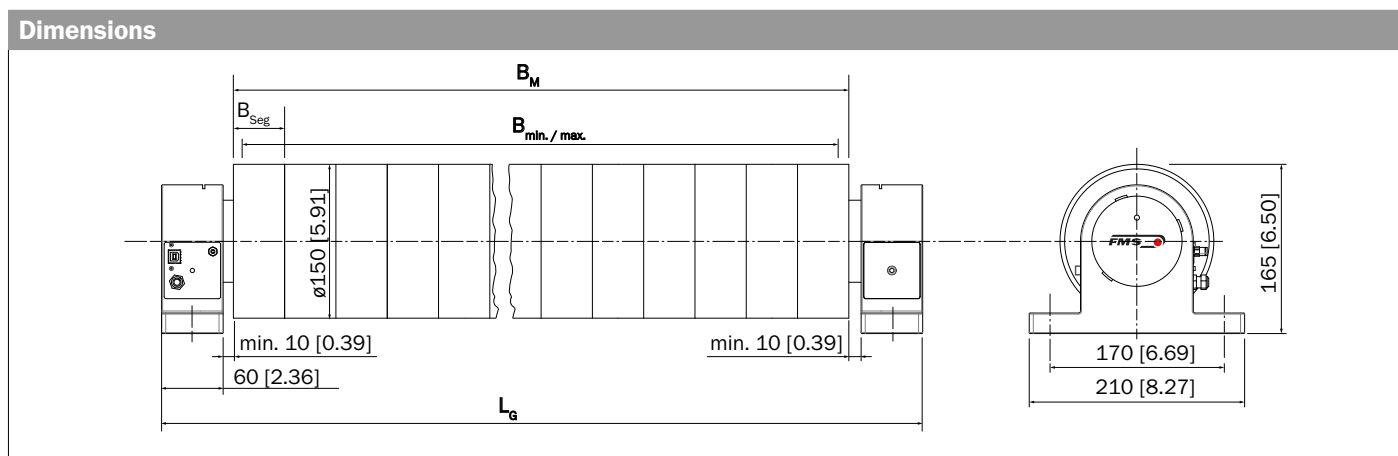


Contact Information	
Company	Project
Name, first name	Tel.
Email	

Parent roll			
max. web width B_{max}	mm	min. web width B_{min}	mm
min. material tension	N	max. material tension	N
min. tension per mm web width	N/mm	max. tension per mm web width	N/mm
material		material speed	m/Min

Measuring roller			
overall length L_G	mm	effective roller width B_M	mm
segment width B_{Seg}	mm	custom. segment width B_{Seg}	mm



Web path			
wrap angle α	$^\circ$	entry angle β	$^\circ$
exit angle γ	$^\circ$		

Installation (Please provide a sketch of the web path including entry and exit angle, if possible.)





Example	Your sketch
<p>$\beta = 70$ $\gamma = 135$ $\alpha = 65$</p>	

Related Products				
Data display	Gateway	Cables	Connectors	Nuts & Bolts

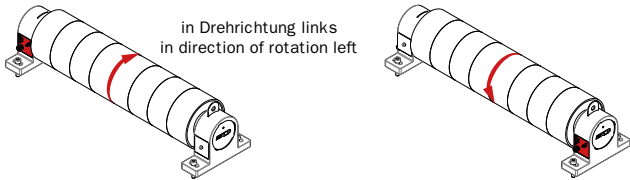
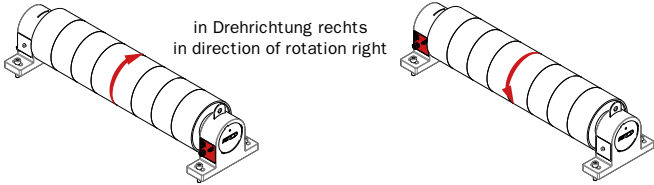
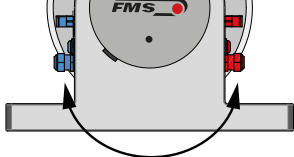
Contact Information

Company	Project
Name, first name	Tel.
Email	

Bracket type P „pillow block“: Orientation

			
PS - South	PW - West	PN - North	PO - East

Connector side

Connectors left (dir. of rot. red arrow)	Connectors right (dir. of rot. red arrow)
	
The connection side is independent of the orientation of the brackets	
Depending on the wrap angle, the connections can also be opposite the position shown above. (blue or red position in the picture on the right).	

Measuring roller

roller material	roller surface
-----------------	----------------