


FMS Solutions for Web Tension Measurement

## **FMS-segFORCE® Compact measuring roller with multiple, independent force sensors**

- **Monitoring of smallest tension deviations from segment to segment**  
High sensitivity, wide measuring range
- **Customized configuration**  
Full flexibility in terms of quantity, width and position of the segments, various nominal forces, full range of roll surface options
- **Easy retrofit and installation**  
Flexible installation options, individual overall length, simple exchange of standard idler roll, identical web path
- **Full system integration**  
PROFINET, EtherNet/IP or ETHERCAT interface for data processing and display via PLC

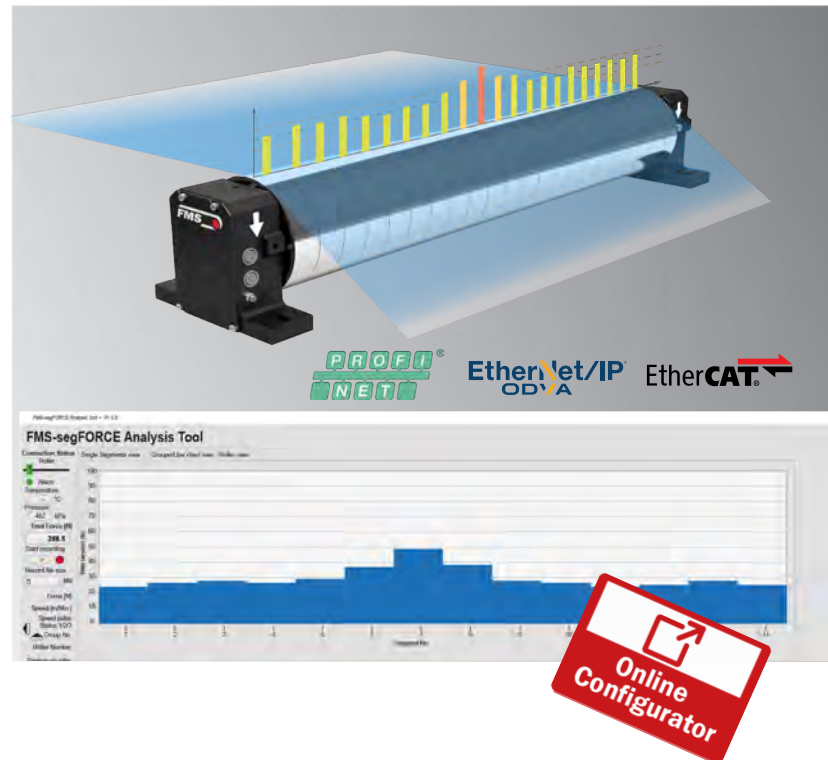

### **FMS-segFORCE**

The centerpiece of the FMS-segFORCE system is the compact measuring roll with multiple independent force sensors. In contrast to conventional tension monitoring systems with a force sensor at each end of the roller, this system provides up to 50 measuring values across the entire web. Especially when it comes to processing of elastic or sensitive materials this extended monitoring offers improvements for various machine and production types.

#### **Slitter / rewinder**

- Easy identification of faulty winding shafts or differential shafts
- Clear display of the tension values of each individual web section
- Highest flexibility in terms of the total number of the segments, segment widths and lateral position


#### **Coating lines**

- Tension profile for better understanding of the process
- Fast detection and elimination of process or material related faults and malfunctions
- Fast quality assessment of the delivered parent rolls

### **Functional description**

The force measuring roller of the FMS-segFORCE system consists of a rigid axis that holds the individual segments. The segments are slidable along the axis. The total number of segments, their width and their lateral position can be selected according to the individual requirements of the machine or the process. The secure locking of the segments on the axis is realized by means of pneumatics via a connector on one of either pillow block type brackets. Power supply and sensor signals are routed wirelessly over the axis. Automatic contacts allow for easy and quick re-adjustment of the lateral position of each segment for the required application. Universal installation of the measuring roller is provided by the two pillow block type brackets. The central electronics as well as the connectors for power supply and pressure air is also located in one of these two brackets. RJ45 sockets are available for the data transfer. Measuring signals can be directly transferred to the PLC or display on any computer with a dedicated software.


**FMS-segFORCE** : Slitter / rewinder

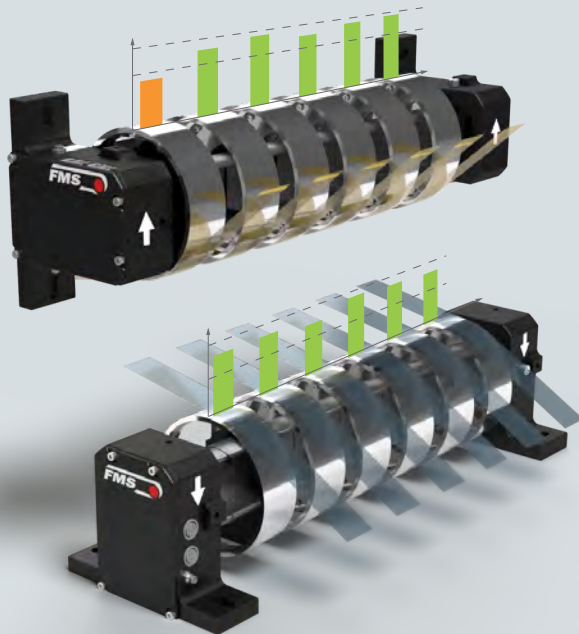

- Tension monitoring of each individual web section
- Highest flexibility in terms of number of segments, widths, position

Schematic of two measuring rollers in the slitter / rewinder. The offset of the individual segments from the lower to the upper measuring roller can be seen clearly. Smallest differences in tension between the individual web sections quickly become visible. The sophisticated design allows all types of wrap angles to be covered. Flexible segment widths and freely adjustable distances between the segments make it possible to configure the measuring rollers for a wide variety of slitting widths.

**FMS-segFORCE** : Coating line

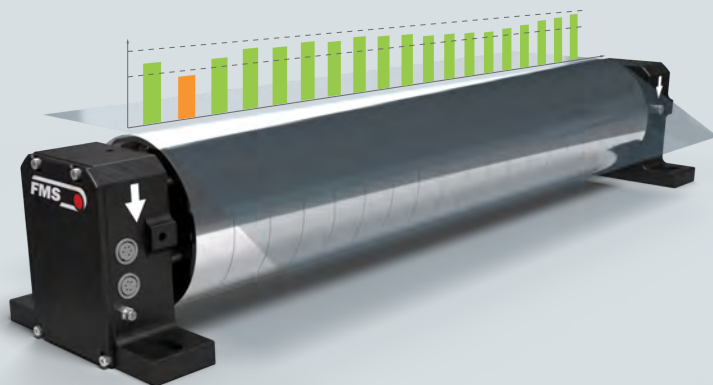

- Up to 50 measuring points along one roller
- Highest sensitivity

Fully equipped segmented measuring roller with brackets (type P pillow block) for universal mounting on the machine frame. Only a 24 (18 to 38) VDC power supply and a compressed air connection are required. Data connection is realized with an RJ-45 socket.


**FMS-segFORCE Analysis Software : Data display and processing – slit / rewinder**



- Quick detection of faulty winding or differential friction shafts
- Clear display of different tension values of the individual webs
- Tension monitoring of up to 50 individual sections

Measuring values of the individual segments.  
The different color of the bar graphs shows the affiliation to the respective measuring roller.


**FMS-segFORCE Analysis Software : Data display and processing – Coating line**

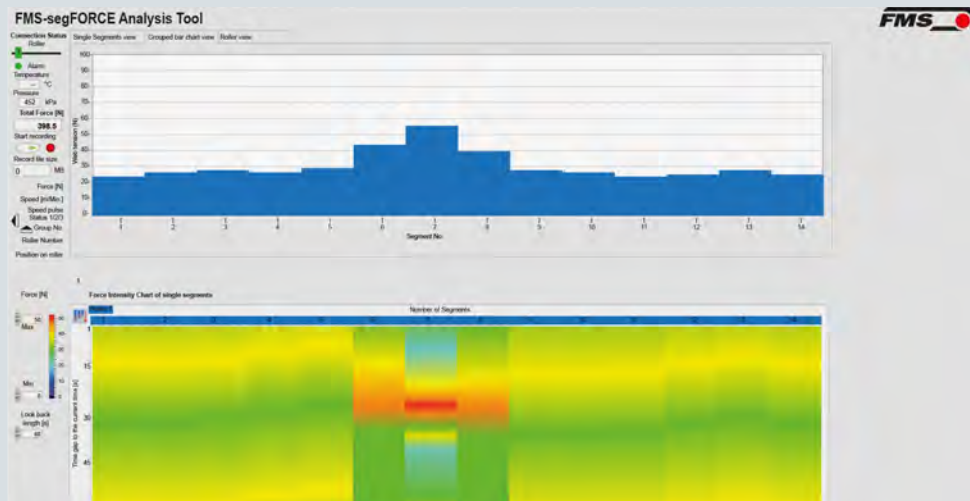


- Tension profile for best understanding of the process
- Fast detection and elimination of process or material related faults and malfunctions
- Fast quality assessment of the delivered parent rolls

Top: Measuring values from each individual segment.  
Bottom: Waterfall diagram of a baggy web. This defect pattern can only be detected with a segmented tension roller.

**FMS-segFORCE : Dimensions slitler / rewinder**

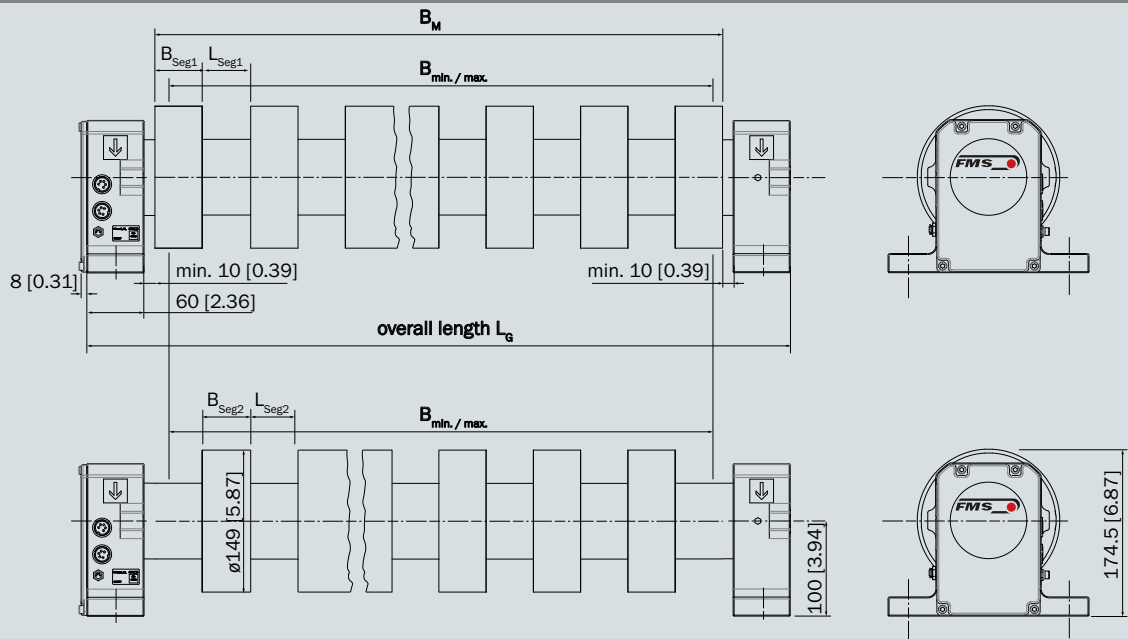


**FMS-segFORCE : Dimensions for tension profile**

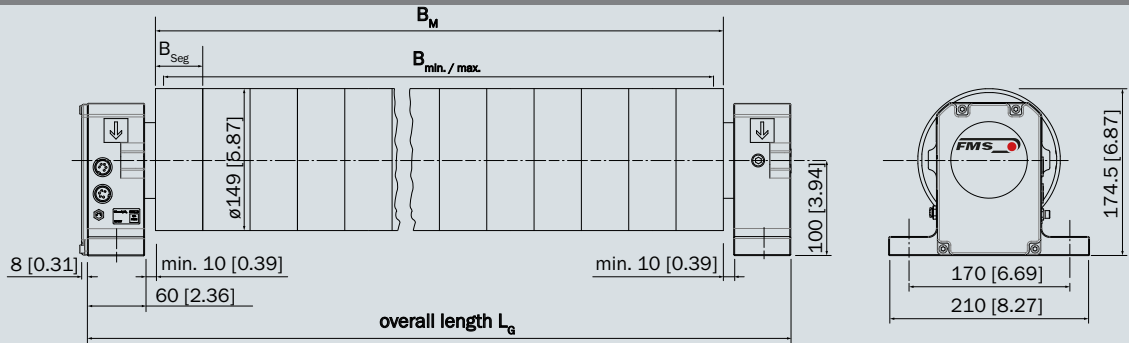

**FMS-segFORCE : Dimensions in mm [in.]**

Maximum width of measuring roller $B_M$	2000 [78.74]
Segment widths $B_{Seg}$	36, 50, 75, 100, 150, 200 [1.42, 1.97, 2.95, 3.94, 9.84, 7.84] customized dimensions upon request
Maximum number of segments per measuring roller	50

**FMS-segFORCE : Bracket orientation type P “pillow block”**

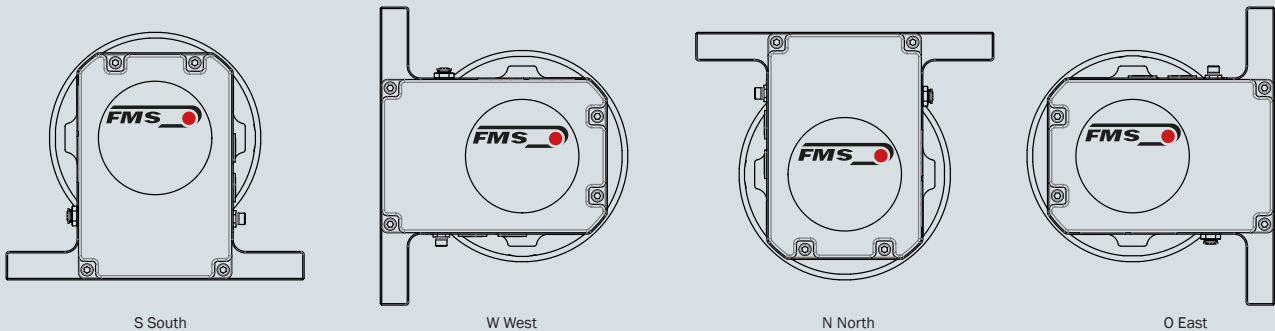

# DATA SHEET

## FMS Tension Control | FMS-segFORCE

FMS-segFORCE : Order code measuring roller						
<b>SFA</b>	<b>-1850</b>	<b>.A</b>	<b>.PN</b>	<b>.L3</b>	<b>.PNET</b>	<b>.Hxxx</b>
						Other options
						Ethernet interface (.PNET PROFINET; .EIP EtherNet/IP; ECAT ETHERCAT)
						Connector side L left, R right (in direction of rotating segment)
						Axis alignment (time-encoded)
						Bracket type P pillow block
						Bracket orientation N North, S South, O East, W West
						Design revision
						Size, installation dimension, overall length in mm
						Series FMS-segFORCE (axis and side brackets)

FMS-segFORCE : Order code segment(s)						
<b>SFS</b>	<b>-50-150</b>	<b>.A</b>	<b>.50</b>	<b>.E</b>		
						Roller material and surface finish
						E Aluminum anodized blank, EB Al. anodized black, A other coatings or finish
						Nominal force in N
						Design revision
						Size
						Segment width and nominal diameter in mm
						Series FMS-segFORCE Segment

FMS-segFORCE : Technical data	
<b>Configuration</b>	via integrated web browser or optional LabVIEW Software
<b>Pressure air</b>	3 to 6 bar, dried

FMS-segFORCE : Technical data force sensor	
<b>Accuracy class</b>	± 0.3 % (F <sub>Nenn</sub> )
<b>Measuring range</b>	50:1
<b>Temperature coefficient</b>	± 0.1 % / 10 K
<b>Temperature range</b>	-10 to +50 °C (14 F to 122 F)
<b>Protection class</b>	IP40
<b>Overload protection</b>	10-times nominal force
<b>Ball bearing</b>	61822
<b>Material</b>	high-strength aluminum


FMS-segFORCE : Technical data pre-amplifier on the force sensor	
<b>Resolution A/D converter</b>	± 32768 Digit (16 Bit)
<b>Measuring error</b>	< 0.05 % FS
<b>Protection class</b>	IP40 (installed)
<b>Power supply</b>	24 VDC (18 to 36 VDC) / 5 W
<b>Temperature range</b>	-10 to +50 °C (14 to 122 °F)

FMS-segFORCE : PROFINET RT Features	
<b>Cycle time</b>	2.5 ms for RT_CLASS_1
<b>Baud Rate</b>	100 Mbit/s
<b>Topology recognition</b>	LLDP, SNMP V1, Physical Device Record Objects
<b>Cyclic process data</b>	number of segments, number of segment groups, status pressure air, overall tension of all segments, temperature electronics, pressure in pressure system, actual readings single segments, actual readings segment groups, web speed single segments, web speed segment groups, number of segment groups, ID of segment group
<b>Media redundancy</b>	Media Redundancy Protocol (MRP) – Client
<b>Supported protocols</b>	RTC Real Time Cyclic Protocol, RT_CLASS_1 (unsynchronized), RTA Real Time Acyclic Protocol, DCP Discovery and Configuration Protocol, DCE/RPC Distributed Computing Environment/Remote Procedure Calls: Connectionless RPC, LLDP Link Layer Discovery Protocol, PTCP Precision Transparent Clock Protocol, SNMP Simple Network Management Protocol
<b>Identification &amp; Maintenance</b>	Reading and Writing of I & M1-3
<b>PROFINET RT specification</b>	V 2.3, legacy startup of specification V 2.2 is supported

FMS-segFORCE : EtherNET/IP Features	
<b>Cycle time</b>	2,5 ms
<b>Baud Rate</b>	10 or 100 Mbit/s
<b>IO Connection Types (implicit)</b>	Exclusive Owner, Listen Only, Input only
<b>Number of Message Connections</b>	Explicit message connections (10); Implicit message connections (5)
<b>Certification</b>	According CT16



**FMS-segFORCE : Typical Application**

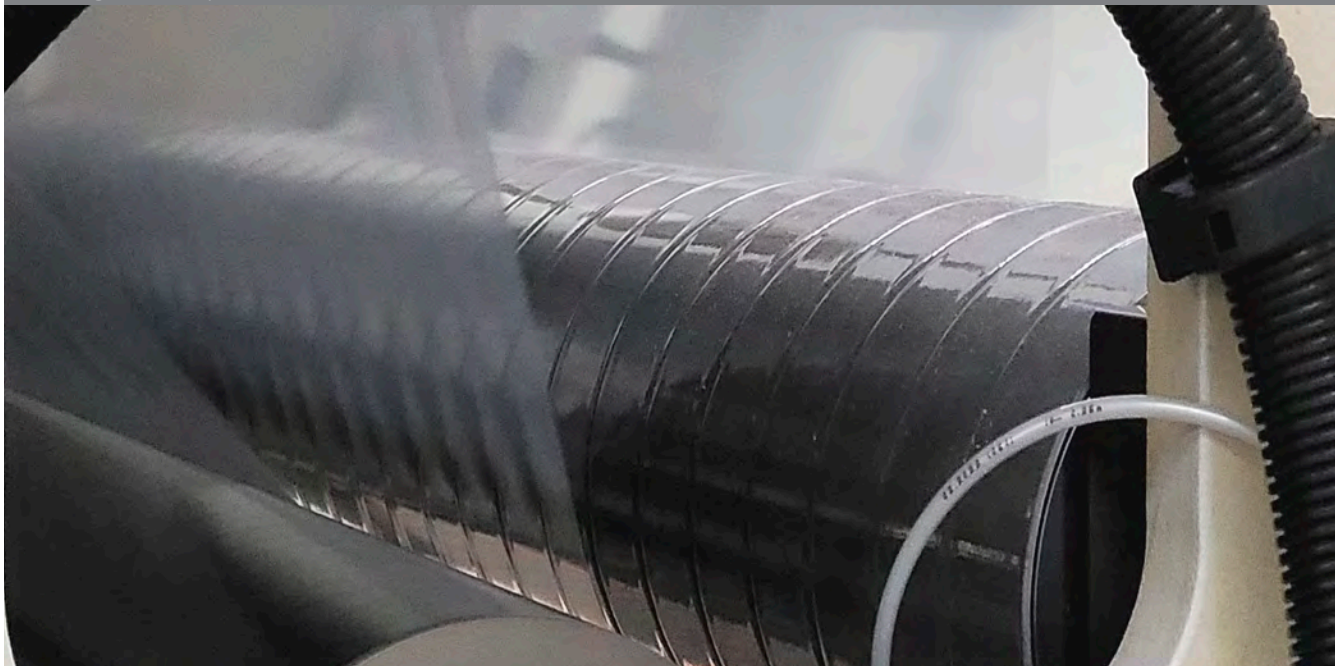

**FMS-segFORCE : Scope of supply**

- Measuring roller with configured segments
- Integrated central electronics
- Two brackets type P “pillow block” with connectors
- Cable for power supply, M8 connector, 10 m (100 ft) length
- Patch cable for configuration via web browser, RJ45, 10 m (100 ft) length

**FMS-segFORCE : Accessories**

- FMS-segFORCE software package with analysis software and converting tool for HDF5 to cvs files.
- Cable with M16 x 1.5, 5-pole connector for alarm outputs, please specify length
- Additional cables or other cable lengths on request

**Other products : Force Sensor, Measuring Amplifier, Tension Controller**

RMGZ9-Series	C203-Series	Measuring Amplifier	Tension Controller
			

**About us**

FMS Force Measuring Systems AG is the market leader in the field of web tension measurement, control and specialist for web guiding solutions. For the wire industry we are the only manufacturer offering a complete range of technologies for force measurement, data processing and radio transmission of signals.

Our in house developed products are used in the manufacturing industry, converting, metals, paper, textiles, as well as in cable and wire rope production. Utilising the latest technology, high quality components and a firm understanding of customer applications, FMS supports customers worldwide in the effort to maximize the productivity of their machines. Since 1993, our highly qualified employees have been creating high-end solutions for machine builders and plant operators. As an owner-managed company, we pride ourselves on being personal and approachable with the ability to make decisive moves fast.

**World Headquarters: FMS Force Measuring Systems AG**

Aspstrasse 6 • 8154 Oberglatt (Switzerland) • Phone + 41 44 852 80 80 • Fax + 41 44 850 60 06  
info@fms-technology.com • [www.fms-technology.com](http://www.fms-technology.com)